


16" x 20" Combo Lathe/Mill

Product Features:

- Two powerful 3/4 HP 110V motors
- Lathe chuck and drill chuck safety guards with limit switch protection and standard tool post safety guard
- Easily change from Lathe mode to Mill mode
- Forward/reverse switch for both operating modes
- Bedways are hardened and precision ground
- Comes with 5" - 3 jaw chuck, imperial and metric change gears, quick change tool post, steady rest, follow rest, thread chasing dial indicator, MT#3 and MT#4 dead centres, 1/2" drill chuck and tool box with adjusting tools

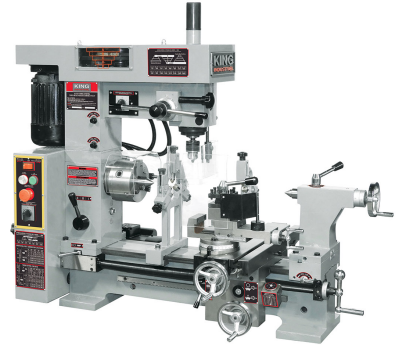

| | |
|--|--------------------------------------|
| MODEL | KC-1620CLM |
| DISTANCE BETWEEN CENTRES | 20" |
| SWING OVER BED AND CARRIAGE | 16-1/2" / 11-1/2" |
| SPINDLE BORE | 1-1/8" |
| HEADSTOCK/TAILSTOCK TAPERS | MT#4 / MT#3 |
| CROSS SLIDE TRAVEL | 8" |
| LATHE SPINDLE SPEEDS | 7 (160-1,360 RPM) |
| THREAD CUTTING RANGE | 36 (4-120 TPI) 22 (0.2-6 mm) |
| AUTOMATIC FEEDING RANGE | 0.002-0.014" / 0.05-0.35 mm |
| DRILLING/FACE MILL/END MILL CAPACITIES | 7/8" / 1-1/8" / 3-1/8" |
| MAX. DISTANCE SPINDLE NOSE TO MILLING TABLE | 12" |
| DRILLING SPEEDS | 16 (120-3,000 RPM) |
| MOTORS (LATHE/MILL) | 3/4 HP, 110V, 9 Amp., 1 Phase, 60 Hz |
| ASSEMBLED DIMENSIONS (LxWxH) / WEIGHT | 43" x 19-1/2" x 38" / 515 lbs |
| PACKAGE DIMENSIONS (LxWxH) / WEIGHT | 45" x 23" x 42" / 615 lbs |
| UPC | 7 72995 01540 5 |